

Laminating System

Single side lamination
Double side lamination **FM-360**




New

FEATURES

- ◆ Single side lamination
- ◆ Adjustable temperature control
- ◆ Adjustable speed control
- ◆ Anti-jam reverse switch
- ◆ Anti-curl bar

Specification:

Model:	FM-360	FM-450	FM-650
Power Supply	AC110、220V/50、60Hz	AC110、220V/50、60Hz	AC110、220V/50、60Hz
Power Consumption	350W	550W	850W
Laminating Width	≤340mm	≤450mm	≤635mm
Laminating Thickness	≤5.0mm	≤5.0mm	≤5.0mm
Laminating Speed	1.6 m/min	1.6 m/min	1.6 m/min
Warm up time	5 mins	5 mins	5 mins
Number of Rollers	4 Rollers	4 Rollers	4 Rollers
Heating Method	Hot Roller	Hot Roller	Hot Roller
Dimensions (L X W X H)	620 x 520 x 310mm	760 x 520 x 310mm	910 x 520 x 310mm
Weight	29.0kgs	42.0kgs	53.0kgs



Cutting blade



Perforating blade



Anti-curl bar



Digital display



Roller tension



Single and double side heating switch

Laminating Pouches

Laminating Film



Glossy polyester laminating pouch/roll film to protect and enhance photo, documents or posters.

Pouch Carrier

Laminating Pouches


Pouch	Sizes(mm)	Pcs/Box
Credit Card	54x86	100
IBM	59x83	
Business Card	60x90	
Key Card	64x99	
Luggage	64x108	
Jumbo	75x105	
Government	83x113	
Postal Card	90x135	
A7	80x111	
A6	111x154	
A5	154x216	
A4	216x303	
A3	303x426	
A2	426x600	

Glossy, Matte, Self Adhesive, White Opaque laminating pouch are available

Standard thickness:

38 - 75 - 80 - 100 - 125 - 150 - 175 - 200 - 250 microns

Laminating Pouch Color Box

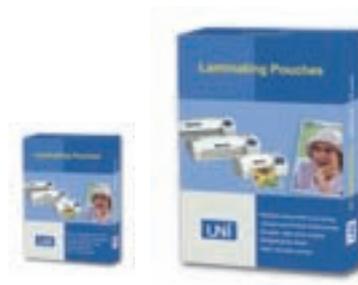

Welcome inquiry for your special sizes.

Chemical Compositions:

- 38 mic (PET 23 + EVA 15)
- 75 mic (PET 38 + EVA 37)
- 80 mic (PET 50 + EVA 30)
- 100 mic (PET 50 + EVA 50)
- 125 mic (PET 75 + EVA 50)
- 150 mic (PET 100 + EVA 50)
- 175 mic (PET 125 + EVA 50)
- 200 mic (PET 125 + EVA 75)
- 250 mic (PET 150 + EVA 100)

Laminating Roll Film

Laminating Film




Laminating Roll Film

Thickness(mic)	Width(mm)	Core (mm)
38	115mm	25 58 76
75	229mm	
80	305mm	
100	330mm	
125	457mm	
150	635mm	
175	800mm	
250	1000mm	


Welcome inquiry for your special sizes.

OHP Film/Transparency Film


OHP Film



Laser Printer



Plain Paper Copier



Inkjet

Type	Sizes(mm)	Thickness(mic)	Sheets/Box
Laser Printer	A4 (210 x 297)	100	100
Plain Paper Copier	A4 (210 x 297)	100	100
	A4 (210 x 297)	110	100
Inkjet	A4 (210 x 297)	100	50

Other sizes and thickness are available

BOPP Thermal Laminating Film

Thermal Laminating Film



Item	Thick (mic)	Length (m)	Core (mm)
Gloss	25	200m	25 58 76
Gloss	30	300m	
Matt	28	350m	
Matt	30	450m	
Embossing	40	1000m	
Matt antisuff	30	2000m	
DigiGloss 30	30	2750m	
DigiMatte 30	30	3000m	

Welcome inquiry for your special sizes.

BOPP Thermal Laminating Film

◆ BOPP Thermal Film is used in various industries like book covers, posters, calendars, maps, documents,

- ◆ Low operating temperature for high speed operation.
- ◆ High quality BOPP film and EVA makes crystal clear image.
- ◆ Environment friendly, pollution-free working Environment and Recyclable.



DigiGloss 30 and DigiMatte 30.

It is suit for the digital printing, such as XEROX DC series, HP Indigo

PET Thermal Laminating Film

Thermal Laminating Film



Item	Thick (mic)	Length (m)	Core (mm)
Gloss	25	200m	25 58 76
Gloss	32	300m	
Gloss	38	1000m	
Matt	32	2000m	
Matt	38	3000m	


Welcome inquiry for your special sizes.

PET Thermal Laminating Film

- ◆ A general purpose laminating film with good clarity and gloss
- ◆ Polyester thermal laminating film also has excellent abrasion and scratch resistance

Cold Laminating Film

Cold Laminating Film/Pressure Sensitive Film

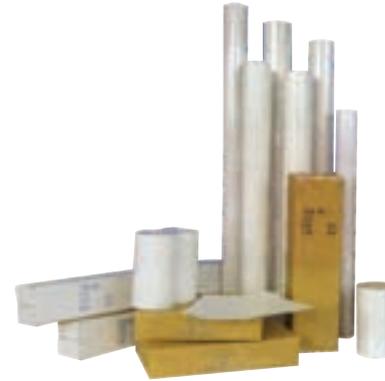

Specification:

Texture: glossy, matte, smooth, crossing, double side
 Standard Width: 0.914/1.07/1.27/ 1.52m, (36/42/50/60")
 Standard Length: 45/50/100m

Code	Texture	Film Thickness	Glue Thickness	Liner Thickness
UVLA80	Anti-UV	80mic	20mic	100gsm
MLAM80	Matte	80mic	20mic	100gsm
GLAM80	Glossy	80mic	20mic	100gsm
SLAM80	Smooth	80mic	20mic	100gsm
CLAM80	Crossing	80mic	20mic	100gsm
MLAM70	Matte	70mic	18mic	100gsm
GLAM70	Glossy	70mic	18mic	100gsm
SLAM70	Smooth	70mic	18mic	100gsm
MLAM60	Matte	60mic	16mic	90gsm
GLAM60	Glossy	60mic	16mic	90gsm
FLGF180	Floor Graphic	180mic	20mic	100gsm
DAVN60	Double Side	60mic	16mic	yellow liner: 90gsm, PET liner: 14mic

Slot Punch

Laminating Accessories



A-101
50pcs/ctn



A-102
Stainless Steel Punch
50pcs/ctn



A-008
50pcs/ctn



B-001
Slot Punch & Corner Rounder
20pcs/ctn



B-002
Slot Punch & Round Punch
20pcs/ctn



Slot Punch
20pcs/ctn



Slot Punch w/Guide
20pcs/ctn



A-004 50
Eyelet Punch
50pcs/ctn

Photo Cutters

Laminating Accessories



E-002 E-003 E-004

	Specification	
	Square corner	Round corner
E-002	25x25mm	25x25mm
	30x40mm	30x40mm
F-001	32x22mm	32x22mm
	32x25mm	32x25mm
E-003	32x40mm	32x40mm
E-003	35x45mm	35x45mm
F-002	40x50mm	40x50mm
	50x50mm	50x50mm
E-004	40x60mm	40x60mm
	50x70mm	50x70mm



E-005




F-001



F-002

Die Cutters

Laminating Accessories



D-0012
PVC Card Cutter
size: 85.5x54mm,
round corner



D-009
ID Cutter
size: 60x88mm,
round corner



D-010
Name Card Cutter
size: 54x86mm, round corner
55x90mm, square corner

Different shape:



Welcome inquiry for your special sizes and shapes.

ID Clip

Laminating Accessories



504P 507PH 507PC 507SPH 502P B-02 T-068



534PC 535PC B-03C 504K2 504K3 CP152 CP151

Badge Holder

Laminating Accessories

Name Badge



B-01
57(W)x90mm(H)
Fit 55(W)x90mm(H) card
Thickness: 350mic
50pcs/box, 2000pcs/ctn



B-20
57(W)x90mm(H)
Fit 55(W)x90mm(H) card
Thickness: 350mic
50pcs/box, 2000pcs/ctn



B-21
57(W)x90mm(H)
Fit 55(W)x90mm(H) card
Thickness: 350mic
100pcs/box, 2000pcs/ctn



B-96
Fit 65(W)x16mm(H)card
Thickness: 400mic
50pcs/box, 1000pcs/ctn

Transparent Vinyl Badge Holder



99PV Horizontal
106(W) x 80mm(H)
Fit 100(W) x 60mm(H) card
Thickness: 250mic
100pcs/bag, 2000pcs/ctn



96PV Vertical
69(W) x 105mm (H)
Fit 63 (W) x 83mm(H) card
Thickness: 250mic
100pcs/bag, 2000pcs/ctn



T-033 Horizontal
100(W) x 75mm(H)
Fit 95(W) x 58 mm(H) card
Thickness: 400mic
100pcs/bag, 2500pcs/ctn



T-033 Vertical
65(W) x 105mm(H)
Fit 62(W) x 91 mm(H) card
Thickness: 400mic
100pcs/bag, 2500pcs/ctn

Badge Holder

Laminating Accessories

High Quality transparent, Water-proff Vinyl Badge Holder



T-037 Horizontal
100(W) x 83mm(H)
Fit 95(W) x 58mm(H)card
Thickness: 400mic
100pcs/bag, 2000pcs/ctn



T-037 Vertical
67(W) x 112mm(H)
Fit 62(W) x 91mm(H)card
Thickness: 400mic
100pcs/bag, 2000pcs/ctn



T-038 Horizontal
115(W) x 94mm(H)
Fit 108(W) x 70mm(H) card
Thickness: 400mic
100pcs/bag, 2000pcs/ctn



T-038 Vertical
84(W) x 120mm(H)
Fit 75(W) x 95mm(H) card
Thickness: 400mic
100pcs/bag, 2000pcs/ctn

High Quality, Semi-transparent Vinyl Badge Holder



T-044 Horizontal
94(W) x 75mm(H)
Fit 85(W) x 55mm(H)card
Thickness: 350mic
100pcs/bag, 3000pcs/ctn



T-044 Vertical
65(W) x 105mm(H)
Fit 55(W) x 85mm(H)card
Thickness: 350mic
100pcs/bag, 3000pcs/ctn



T-045 Horizontal
114(W) x 91mm(H)
Fit 108(W) x 70mm(H)card
Thickness: 350mic
100pcs/bag, 3000pcs/ctn



T-045 Vertical
81(W) x 126mm(H)
Fit 70(W) x 128mm(H)card
Thickness: 350mic
100pcs/bag, 3000pcs/ctn



T-046 Vertical
100(W) x 155mm(H)
Fit 91(W) x 128mm(H)card
Thickness: 350mic
100pcs/bag, 3000pcs/ctn

High Quality, Semi-transparent, Water-proff Vinyl Badge Holder



T-047 Horizontal
94(W) x 79mm(H)
Fit 85(W) x 55mm(H)card
Thickness: 350mic
100pcs/bag, 2000pcs/ctn



T-047 Vertical
65(W) x 115mm(H)
Fit 55(W) x 85mm(H) card
Thickness: 350mic
100pcs/bag, 2000pcs/ctn



T-048 Horizontal
114(W) x 100mm(H)
Fit A7, 108(W) x 75mm(H) card
Thickness: 350mic
100pcs/bag, 2000pcs/ctn



T-048 Vertical
83(W) x 132mm(H)
Fit A7, 76(W) x 105mm(H) card
Thickness: 350mic
100pcs/bag, 2000pcs/ctn



T-049 Vertical
100 (W) x 155mm(H)
Fit B7, 91(W) x 128mm(H) card
Thickness: 350mic
100pcs/bag, 2000pcs/ctn

High Quality, Colorful Transparent Vinyl Badge Holder



T-087 Horizontal
95(W) x 75mm(H)
Fit 85(W) x 55mm(H)card
Thickness: 400mic
100pcs/bag, 2000pcs/ctn



T-087 Vertical
64(W) x 109mm(H)
Fit 55(W) x 85mm(H)card
Thickness: 400mic
100pcs/bag, 2000pcs/ctn



T-088 Horizontal
112(W) x 95mm(H)
Fit 105(W) x 74mm(H)card
Thickness: 400mic
100pcs/bag, 2000pcs/ctn



T-088 Vertical
82(W) x 126mm(H)
Fit 74(W) x 105mm(H)card
Thickness: 400mic
100pcs/bag, 2000pcs/ctn



T-089 Horizontal
132(W)x110mm(H)
Fit 128(W)x91mm(H)card
Thickness: 400mic
100pcs/bag, 2000pcs/ctn



T-089 Vertical
92(W)x148mm(H)
Fit 91(W)x128mm(H)card
Thickness: 400mic
100pcs/bag, 2000pcs/ctn

Badge Holder

Laminating Accessories

High Quality,Colorful Semi-transparent Vinyl Badge Holder



T-090 Horizontal
95(W) x75mm(H)
Fit 85(W) x55mm(H)card
Thickness: 350mic
100pcs/bag, 2000pcs/ctn



T-090 Vertical
64(W) x109mm(H)
Fit 55(W) x85mm(H)card
Thickness: 350mic
100pcs/bag, 2000pcs/ctn



T-091 Horizontal
112(W) x95mm(H)
Fit 105(W) x74mm(H)card
Thickness: 350mic
100pcs/bag, 2000pcs/ctn



T-091 Vertical
82(W) x126mm(H)
Fit 74(W) x105mm(H)card
Thickness: 350mic
100pcs/bag, 2000pcs/ctn



T-092 Horizontal
132(W) x110mm(H)
Fit 128(W) x91mm(H)card
Thickness: 350mic
100pcs/bag, 2000pcs/ctn



T-092 Vertical
92(W) x148mm(H)
Fit 91(W) x128mm(H)card
Thickness: 350mic
100pcs/bag, 2000pcs/ctn

High Quality,Colorful Opaque,Vinyl Badge Holder



T-093 Horizontal
95(W) x72mm(H)
Fit 85(W) x55mm(H)card
Thickness: 400mic
100pcs/bag, 2000pcs/ctn



T-093 Vertical
64(W) x107mm(H)
Fit 55(W) x85mm(H)card
Thickness: 400mic
100pcs/bag, 2000pcs/ctn



T-094 Horizontal
112(W) x95mm(H)
Fit 105(W) x74mm(H)card
Thickness: 400mic
100pcs/bag, 2000pcs/ctn



T-094 Vertical
81(W) x125mm(H)
Fit 74(W) x105mm(H)card
Thickness: 400mic
100pcs/bag, 2000pcs/ctn



T-095 Horizontal
132(W) x110mm(H)
Fit 128(W) x91mm(H)card
Thickness:400mic
100pcs/bag, 2000pcs/ctn



T-095 Vertical
92(W)x148mm(H)
Fit 91(W)x128mm(H)card
Thickness:400mic
100pcs/bag, 2000pcs/ctn

Rigid Badge Holder



PHV2 Horizontal
92(W) x 70mm(H)
Fit 86(W) x 54mm(H) card
50pcs/bag, 1000pcs/ctn



PHV3 Vertical
60(W) x 100mm(H)
Fit 54(W) x 86mm(H) card
50pcs/bag, 1000pcs/ctn



3020 Horizontal
90(W) x 65mm(H)
Fit 86(W) x 54mm(H) card
50pcs/bag, 1000pcs/ctn



3020 Vertical
58(W) x 100mm(H)
Fit 54(W) x 86mm(H) card
50pcs/bag, 1000pcs/ctn


Leather Badge Holder



30320
50pcs/bag, 1000pcs/ctn



30325
50pcs/bag, 1000pcs/ctn



Metal neck chain
Length: 70cm, 80cm
Diameter: 2.4mm
Packing: 100pcs/bag, 2000pcs/ctn



Luggage Loop
100pcs/bag, 2000pcs/ctn

Retractable Badge Reel

Laminating Accessories




Welcome inquiry for your special color and design.

Double Side Smile Badge Reel

Laminating Accessories

Colour: Grey Black Red Blue
 Used for 10mm\15mm\20mm lanyards

Stainless steel core

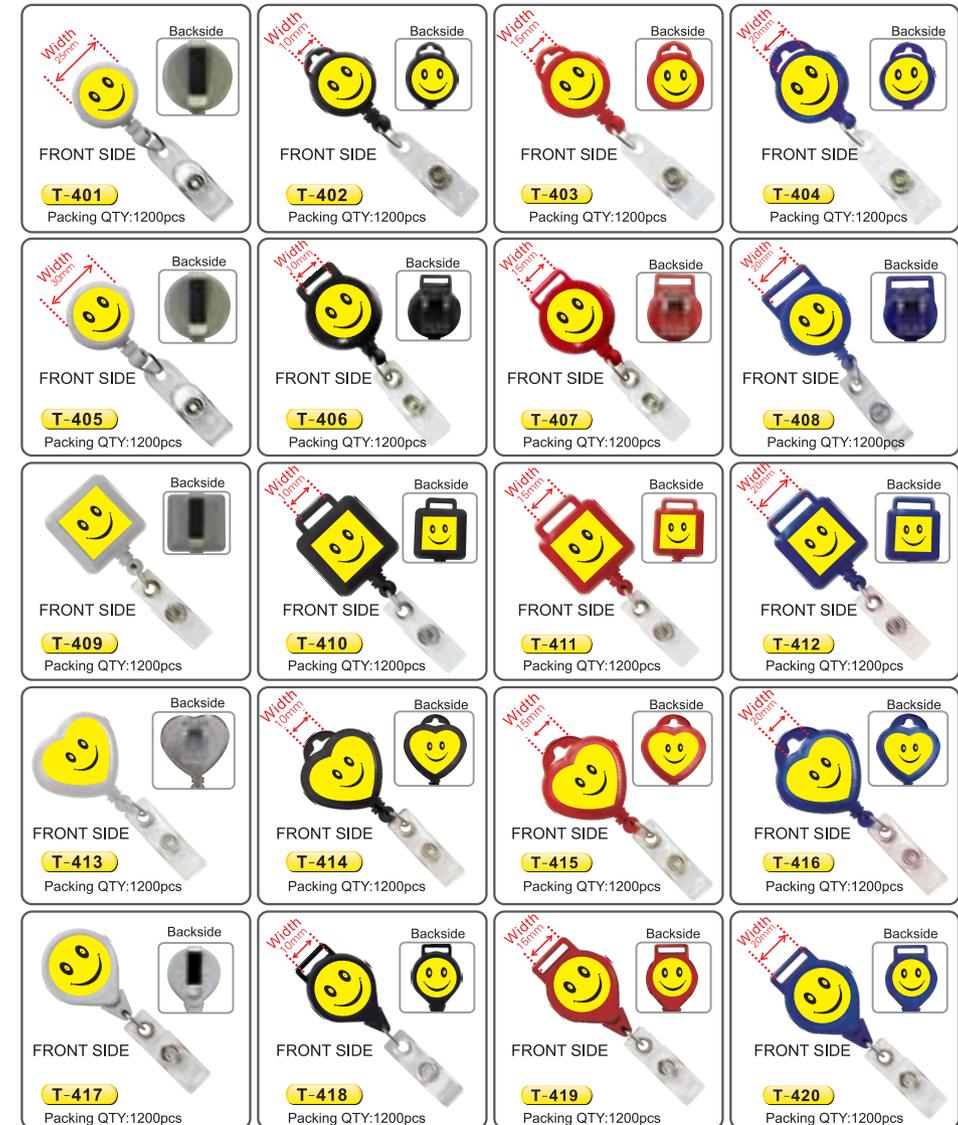


Lanyards

Laminating Accessories

10mm Packing QTY:1500pcs

New

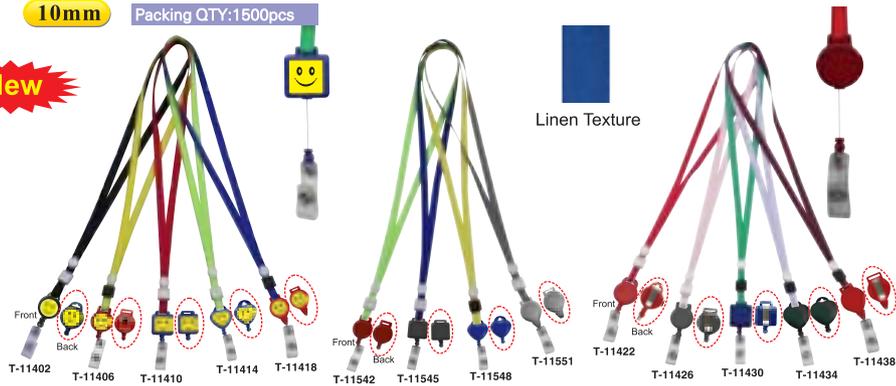


15mm Packing QTY:1500pcs

New



20mm Packing QTY:1000pcs

New

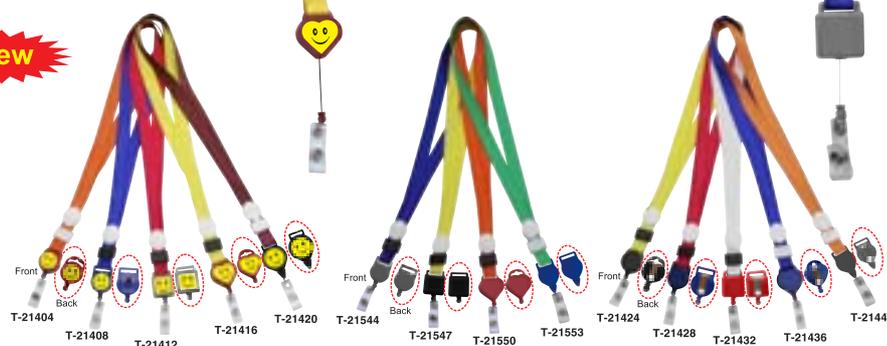

Lanyards

Laminating Accessories



Lanyards

Laminating Accessories

New



K-1064
Packing QTY: 3000pcs



K-1065
Packing QTY: 3000pcs



K-1066
Packing QTY: 3000pcs



K-1067
Packing QTY: 3000pcs



K-1068
Packing QTY: 3000pcs



K-1069
Packing QTY: 3000pcs



K-1070
Packing QTY: 3000pcs



K-1071
Packing QTY: 3000pcs



New



K-1081
Packing QTY: 2000pcs



K-1082
Packing QTY: 2000pcs



K-1083
Packing QTY: 2000pcs



K-1084
Packing QTY: 2000pcs



K-1085
Packing QTY: 2000pcs



K-1086
Packing QTY: 2000pcs



K-1087
Packing QTY: 2000pcs



K-1088
Packing QTY: 2000pcs



K-1089
Packing QTY: 2000pcs

DWL-4CF

Pouch Laminator



DWL-4CF



DWL-3AF

CE

Specification:

Model:	DWL-4CF	DWL-3AF
Power Supply	AC110, 220V/50, 60Hz	AC110, 220V/50, 60Hz
Power Consumption	400W	450W
Laminating Width	245mm	340mm
Laminating Thickness	0.6mm	0.6mm
Laminating Speed	0.35m/min	0.35m/min
Warm up time	4~6min	4~6min
Number of Rollers	4 rollers	4 rollers
Heating Method	Infrared Hot Shoe	Infrared Hot Shoe
Dimension(L x W x H)	395×170×90	475×170×90
Weight	2.80kgs	3.54kgs

LP-120

Pouch Laminator



LP-120

2 Rollers Heavy Duty ID Pouch Laminator

Specification:

Model:	LP-120
Power Supply	AC110, 220V/50, 60Hz
Power Consumption	230W
Laminating Width	≤120mm
Laminating Thickness	≤1.5mm
Laminating Speed	0.2m/min
Warm up time	3 min
Number of Rollers	2 Rollers
Heating Method	Infrared Hot Shoe
Dimension (L x W x H)	220×160×90mm
Weight	2.4kgs

LP-320

Pouch Laminator



LP-320

CE

- ◆ Variable temperature control
- ◆ Forward and reverse function
- ◆ Hot and cold lamination
- ◆ Carrier free operation

Specification:

Model:	LP-220	LP-320	LP-450
Power Supply	AC110, 220V/50, 60Hz		
Power Consumption	420W	620W	820W
Laminating Width	≤220mm	≤320mm	≤450mm
Laminating Thickness	≤1.5mm		
Laminating Speed	0.5m/min	0.5m/min	0.5m/min
Warm up time			
Number of Rollers	4 Rollers		
Heating Method	Infrared Hot Shoe		
Dimension (L x W x H)	400×200×110mm	500×200×110mm	630×200×110mm
Weight	6.2kgs	7.7kgs	11.0kgs

LP-330C

Pouch Laminator



LP-330C

CE GS



- ◆ Roller protection system
- ◆ Mica hot shoe



LP-330R

Hot Roller Laminator

Specification:

Model:	LP-230C	LP-330C	LP-330R
Power Supply	AC110, 220V/50, 60Hz		
Power Consumption	420W	620W	430W
Laminating Width	≤230mm	≤330mm	≤330mm
Laminating Thickness	≤1.5mm		
Laminating Speed	0.5m/min	0.5m/min	0.5m/min
Warm up time	5 min	5 min	8 min
Number of Rollers	4 Rollers		
Heating Method	Mica Hot Shoe	Mica Hot Shoe	Hot Roller
Dimension (L x W x H)	400×240×105mm	500×240×105mm	520×240×105mm
Weight	6.5kgs	8.5kgs	8.5kgs

PDA-330SL

Pouch Laminator



PDA3-330SL

Heating lamp 4 rollers



LCD Display

Specification:

Model:	PDA3-330SL
Power Supply	AC110, 220V/50, 60Hz
Power Consumption	650W
Laminating Width	≤330mm
Laminating Thickness	≤1.5mm
Laminating Speed	0.3-1.5m/min
Warm Up Time	5mins
Number of Rollers	4 Rollers
Heating Method	Heating Lamp
Dimension(L x W x H)	506X250X120mm
Weight	9.0 kgs

LW-330R

Pouch Laminator



LW-330R

6 Roller Laminator

- ◆ Hot roller heating technology
- ◆ Reverse button removing jammed films
- ◆ Hot and cold lamination for different usage
- ◆ Digital display system
- ◆ Adjustable temperature and speed

Specification:


Model:	LW-330R	LW-450R
Power Supply	AC110, 220V/50, 60Hz	
Power Consumption	1150W	1550W
Laminating Width	≤330mm	≤450mm
Laminating Thickness	≤1.0mm	
Laminating Speed	0.3-1.50m/min	
Warm up time	5 min	
Number of Rollers	6 Rollers	
Heating Method	Hot Roller	
Dimension(L x W x H)	550×295×135mm	670×295×135mm
Weight	17.0kgs	20.0kgs

LW-360R/450R

Roll Laminator



LW-360R



Film Trimmer (optional)

- ◆ 8-bit microprocessor control system
- ◆ Hot roller heating technology
- ◆ Hot and cold laminating for different need
- ◆ Digital display system
- ◆ Adjustable motor speed according to different material
- ◆ Adjustable temperature control
- ◆ Reverse button removing jammed films
- ◆ Tension control on film mandrel
- ◆ Metallic construction for durability

Specification:


Model:	LW-360R	LW-450R
Power Supply	AC110, 220V/50, 60Hz	AC110, 220V/50, 60Hz
Power Consumption	650 W	950W
Laminating Width	≤340mm	≤450mm
Laminating Thickness	≤5.0mm	≤5mm
Laminating Speed	0.2-1.60m/min	0.2-1.6m/min
Warm up time	5 min	5min
Number of Rollers	4 Rollers	4Rollers
Heating Method	Hot Roller	Hot Roller
Dimension(L x W x H)	620×520×310mm	760×520×310mm
Weight	28.0kgs	42.0kgs
Core Size:	Standard: 1inch, optional: 2-1/4, 3inch	standard: 1inch, optional: 2-1/4, 3inch

LW-650R/1100R

Roll Laminator



LW-650R (optional stand)

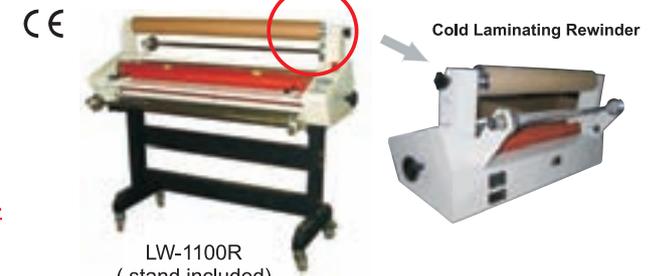

LW-1100R (stand included)

Cold Laminating Rewinder

Specification:

Model:	LW-650R	LW-1100R
Power Supply	AC110, 220V/50, 60Hz	
Power Consumption	1600 W	2000W
Laminating Width	≤635mm	≤1050mm
Laminating Thickness	≤5.0mm	
Laminating Speed	0.2-1.6m/min	0.2-1.6m/min
Warm up time	5 min	
Number of Rollers	4 Rollers	
Heating Method	Hot Roller	
Dimension(L x W x H)	910×520×310mm	1370×520×1170mm
Weight	38.0kgs	70.0kgs
Core Size:	standard: 1 inch, optional: 2-1/4, 3inch	standard: 1 inch, optional: 2-1/4, 3inch

LW-360AF

Thermal Roll Laminator / Single Sided Laminator



LW-360AF

- ◆ Automntic Feeding
- ◆ Single sided laminating
- ◆ Double sided laminating

Specification:

Model:	LW-360AF
Power Supply	AC110、220V/50、60Hz
Power Consumption	700W
Laminating Width	≤340mm
Laminating Thickness	≤5.0mm
Laminating Speed	0.2-1.6m/min, 9 levels
Warm up time	5 mins
Number of Rollers	4 Rollers
Heating Method	Hot Roller
Dimension(L×W×H)	1052×569×633mm
Weight	62.0kgs
Core Size	Standard:1 inch, optional:2-1/4, 3 inch

SH-380

Thermal Roll Laminator / Single Sided Laminator



Pneumatic Single Side Laminator



SH-380



Specification:

Model:	SH-380
Laminating width	≤380 mm
Laminating thickness	≤5mm
Laminating temperature	≤150℃
Laminating Speed	≤11.8m/min
Roller Pressure	Pneumatic
Air Requirement	0.8 Mpa ≥ 0.2 m ³ / min
Power Supply	AC100、110、220-240V / 50、60 Hz
Power	1700W
Dimensions W×D×H	1546×720×700 mm
Weight	190.0 kgs

SH-650

Thermal Roll Laminator / Single Sided Laminator



SH-360



SH-650

SINGLE SIDED LAMINATOR

- ◆ Single side lamination
- ◆ Adjustable temperature control
- ◆ Adjustable speed control
- ◆ Anti-jam reverse switch
- ◆ Anti-curl bar

Specification:

Model:	SH-360	SH-450	SH-650
Power Supply	AC110、220V/50、60Hz		
Power Consumption	350W	550W	850W
Laminating Width	≤340mm	≤450mm	≤635mm
Laminating Thickness	≤5.0mm	5.0mm	5.0mm
Laminating Speed	1.6m/min	1.6m/min	1.6m/min
Warm Up Time	5mins	5mins	5mins
Number of Rollers	4 Rollers	4 Rollers	4 Rollers
Heating Method	Hot Roller	Hot Roller	Hot Roller
Dimension(L x W x H)	620×520×310mm	760×520×310mm	910×520×310mm
Weight	29.0kgs	42.0kgs	53.0kgs

SH-620

Thermal Roll Laminator / Single Sided Laminator



SH-620

Pneumatic Single Side Laminator

Specification:

Model:	SH-620
Laminating width	≤620 mm
Laminating Speed	≤12 m / min
Laminating Temp.	20℃ ~ 150℃
Max. Nip Opening	≤5 mm
Roller Pressure	Pneumatic
Air Requirement	0.6 Mpa ≥ 0.2 m ³ / min
Power Supply	AC100、110、220-240V / 50、60 Hz
Power	1700W
Dimensions W×D×H	1546×963×702 mm
Weight	215 kgs

KDFM-900

Thermal Roll Laminator / Single Sided Laminator

MANUAL SINGLE SIDED AND
DOUBLE SIDED LAMINATOR

- ◆ Manually feed and manually separate
- ◆ Fast Warm-Up Time
- ◆ One Sided and double sided lamination



KDFM-900

Specification:

Model:	KDFM-720	KDFM-900	KDFM-1000	KDFM-1200
Power Supply:	AC220V/50HZ	AC 380V/50HZ, 3N	AC 380V/50HZ, 3N	AC 380V/50HZ, 3N
Heating Power Consumption	2400W	3600W	4800W	5400W
Motor Power Consumption	400W	550W	750W	1100W
Max. Sheet Format	620(W) x 880(L) mm	820(W) x 1040(L) mm	900(W) x 1040(L) mm	110(W) x 1040(L) mm
Paper Thickness	125-500g/m ²	125-500g/m ²	125-500g/m ²	125-500g/m ²
Laminating Speed	0-20m/min	0-20m/min	0-20m/min	0-20m/min
Warm Up Time	15mins	15mins	15mins	15mins
Heating System	Hot Roller	Hot Roller	Hot Roller	Hot Roller
Max. Operating Temperature	130°C	130°C	130°C	130°C
Feeding	Manual	Manual	Manual	Manual
Separation	Manual	Manual	Manual	Manual
Main Roller Pressure	Coil Springs	Coil Springs	Coil Springs	Coil Springs
Laminating Roller Surface	Chrome	Chrome	Chrome	Chrome
Dimension(L x W x H)	1150 x 1100 x 1400mm	1450 x 1100 x 1400mm	1550 x 1100 x 1450mm	1750 x 1250 x 1450mm
Weight	260.0kgs	380.0kgs	480.0kgs	600.0kgs

YDFM-720

Thermal Roll Laminator / Single Sided Laminator

MANUAL SINGLE SIDED LAMINATOR

- ◆ Manually feed and manually separate
- ◆ Fast Warm-Up Time
- ◆ Hydro pneumatic pressure system
- ◆ It comes with a loading conveyor belt for easy manual feeding



YDFM-720

Specification:

Model:	YDFM-720	YDFM-920	YDFM-1200
Power Supply:	AC 380V/50HZ, 3N	AC 380V/50HZ, 3N	AC 380V/50HZ, 3N
Heating Power Consumption	4000W	6000W	6500W
Motor Power Consumption	550W	750W	1200W
Max. Sheet Format	620(W) x 880(L) mm	820(W) x 1040(L) mm	1000(W) x 1040(L) mm
Paper Thickness	125-500g/m ²	125-500g/m ²	125-500g/m ²
Laminating Speed	0-40m/min	0-40m/min	0-40m/min
Warm Up Time	15mins	15mins	15mins
Heating System	Hot Roller	Hot Roller	Hot Roller
Max. Operating Temperature	130°C	130°C	130°C
Feeding	Manual	Manual	Manual
Separation	Manual	Manual	Manual
Main Roller Pressure	Pneumatic Cylinder	Pneumatic Cylinder	Pneumatic Cylinder
Laminating Roller Surface	Chrome	Chrome	Chrome
Dimension(L x W x H)	1900 x 1300 x 1600mm	1900 x 1500 x 1600mm	1900 x 1700 x 1600mm
Weight	400.0kgs	500.0kgs	600.0kgs

SFML-520

Thermal Roll Laminator / Single Sided Laminator

SEMI-AUTOMATIC SINGLE SIDED LAMINATOR WITH SEPARATOR

CE



SFML-520



Overlop Regulator



PIC Control Panel

Specification:

Model:	SFML-520
Power Supply:	AC 380V/50HZ, 3N
Heating Power Consumption	7500W
Max. Sheet Format	500(W) x 700(L) mm
Paper Thickness	125-500g/m ²
Laminating Speed	0-20m/min
Warm Up Time	25mins
Heating System	Hot Roller
Max. Operating Temperature	120°C
Feeding	Manual
Separation	Automatic
Main Roller Pressure	Pneumatic Cylinder
Laminating Roller Surface	Chrome
Dimension(L x W x H)	2050 x 1250 x 1410mm
Weight	300.0kgs

SFML-520B

Thermal Roll Laminator / Single Sided Laminator

SEMI-AUTOMATIC SINGLE SIDED & DOUBLE SIDED LAMINATOR WITH SEPARATOR

New

APPLICATIONS

To suit both single side and double side film lamination

CE



SFML-520B

Specification:

Model :	SFML-520B
Max Laminating Width	520mm
Working Speed	0-25m/min(single) 0-10m/min(double)
Paper Thickness	100-500gsm
Gross Power	15kw
Overall Dimensions	3300×1150×1400mm
Weight	1000kgs


SADF-540B

Thermal Roll Laminator / Single Sided Laminator

AUTOMATIC SINGLE SIDED & DOUBLE SIDED LAMINATOR WITH SEPARATOR



- ◆ Automatic paper feeding system
- ◆ Man-machine interface system
- ◆ Cast aluminum heating roller
- ◆ Pneumatic pressuring system
- ◆ Adopting Anti-curling device
- ◆ Automatic paper separating system

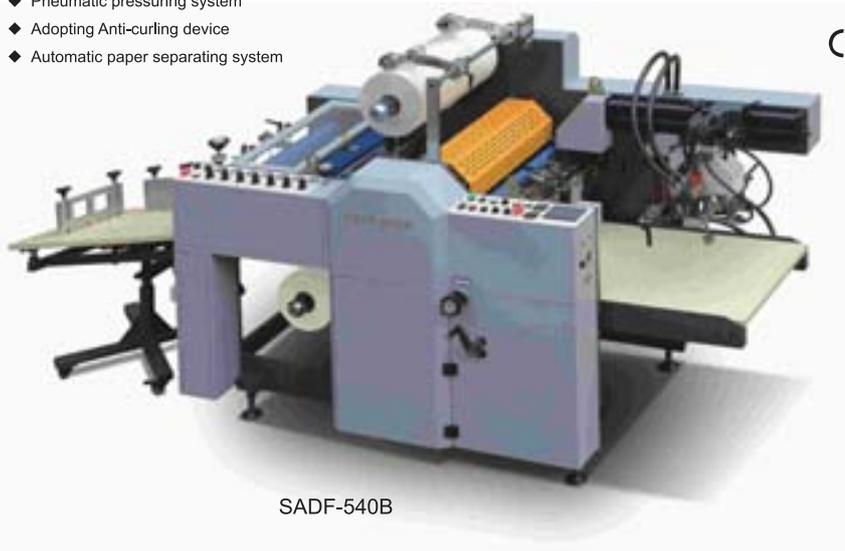

SADF-540B



Specification:

Model :	SADF-540B
Max Paper Size	780×540mm
Min Paper Size	290×290mm
Laminating Speed	0-30m/min (single side) 0-25m/min (double side)
Paper Thickness	100-500gsm
Gross Power	18kw
Overall Dimensions	3200×1250×1500mm
Weight	1300kgs

LBS650

Cold Laminator




LBS650

Specification:


Model:	LBS650	LBS1000
Max Laminating Width	650mm	1000mm
Operation Method	Manual	Manual
Max Lifting Thickness of Roller	10mm	10mm
Pressure Adjustment Method	Separately	Separately
Net Weight:	13.0kgs	30.0kgs
Dimension (L x W x H)	750×360×200mm	1185×260×430mm

BU-650 II / BU-650 II PLUS

Cold Laminator

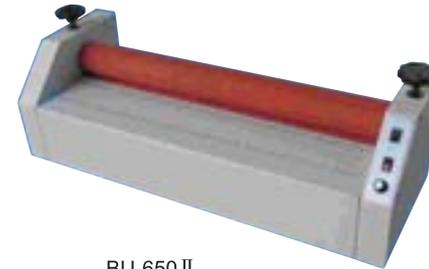

BU-650 II

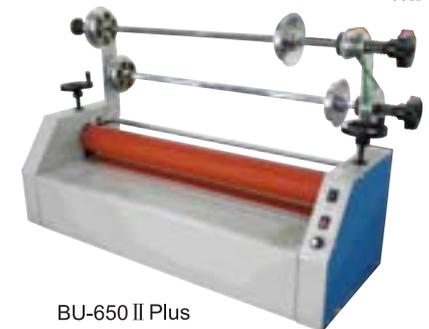

BU-650 II Plus

Specification:

Model:	BU-650 II	BU-650 II Plus
Max Laminating Width	650mm	650mm
Operation Method	Electric	Electric
Max Lifting Thickness of Roller	10mm	10mm
Pressure Adjustment Method	Separately	Separately
Net Weight:	27.0kgs	31.0kgs
Dimension (L x W x H)	850×360×370mm	850×360×370mm

BU-1600 II

Cold Laminator

New

CE



BU-1600 II Warm



Specification:

Model:	BU-1600 II Warm
Maximum working width	1600mm
Maximum speed	6 m/min
Lifting height for roller	35mm
Roller's diameter	120mm
Motor power	60W
Max. heating temperature	60°C
Electrical requirement	AC110, 220V/50, 60Hz
Packing	2050×630×710mm
Weight	220.0kgs

BU-1600C II Z

Cold Laminator

CE



BU-1600C II Z

Specification:

Model:	BU-1300 II Z	BU-1600C II Z	BU-2040 II Z
Max Laminating Width	1300mm	1580mm	2040mm
Operation Method	Manual	Electric	Manual
Max Lifting Thickness of Roller	12mm	12mm	12mm
Pressure Adjustment Method	Separately	Separately	Separately
Net Weight:	74.0kgs	230.0kgs	74.0kgs
Dimension (L x W x H)	1305×480×360mm	1930×500×630mm	1305×480×360mm

BU-1600RFZ-Y

Cold Laminator

CE



New



BU-1600RFZ-Y



Specification:

Model:	BU-1600RFZ-Y
Maximum working width	1600mm
Maximum speed	6 m/min
Lifting height for roller	35 mm
Laminating temperature	30-60°C/150°C
Motor power	1200W
Heating power	3000W
Max. heating temperature	150°C
Electrical requirement	AC110, 220V/50, 60Hz
Packing	2090×770×1450mm
Weight	320.0kgs

LD-1600HIV

Cold Laminator



Manual Cold Laminator

LD-1600HIV

Specification:

Model:	LD-1400HIV-L	LD-1600HIV
Max Laminating Width	1400mm	1600mm
Operation Method	Manual	Manual
Max Lifting Thickness of Roller	8mm	20mm
Pressure Adjustment Method	Separately	Separately
Net Weight:	110.0kgs	92.0kgs
Dimension (L x W x H)	1586×350×352mm	1740×350×335mm

LD-1600EIV-L

Cold Laminator



Electrical Cold Laminator

LD-1600EIV-L

Specification:

Model:	LD-1400EIV-L	LD-1600EIV-L
Max Laminating Width	1400mm	1600mm
Operation Method	Electric	Electric
Max Lifting Thickness of Roller	8mm	20mm
Pressure Adjustment Method		Separately
Speed		1.4-4m/min
Power Supply		AC110、220V/50、60Hz
Power Consumption	50W	50W
Net Weight	59.0kgs	94.0kgs
Dimension (L x W x H)	1456×350×340mm	1810×365×355mm

LD-1600EMTN

Cold Laminator

CE



LD-1600EMTN

EMTN series have following functions except for the function of EMN series.

- ◆ Anti-stick roller
- ◆ Low temperature heating system
- ◆ Parameter digital display
- ◆ Safety eye protection



Specification:

Model:	LD-1200EMTN	LD-1400EMTN	LD-1600EMTN
Max Laminating Width	1200mm	1400mm	1600mm
Operation Method	Electric		
Max Lifting Thickness of Roller	25mm	25mm	25mm
Pressure Adjustment Method	Combined		
Temperature Adjustment Rang	Room temperature-60 °C		
Speed	0-3.5m/min		
Power Supply	AC110、220V/50、60Hz		
Power Consumption	900W	1000W	1400W
Net Weight	170.0kgs	183.0kgs	208.0kgs
Dimension (L x W x H)	1685x595x1180mm	1885x595x1180mm	2085x595x1180mm

LD-1400EMN

Cold Laminator



LD-1400EMN

- ◆ The combined pressure adjustment device
- ◆ Separating the back paper automatically
- ◆ Stepless speed change adjustment
- ◆ Click and continue control laminating

CE

Specification:

Model:	LD-650EM	LD-1200EMN	LD-1400EMN	LD-1600EMN
Max Laminating Width	650mm	1200mm	1400mm	1400mm
Operation Method	Electric			
Max Lifting Thickness of Roller	6mm	25mm	25mm	25mm
Pressure Adjustment Method	Combined			
Speed	1.32m/min	0.7-2.0m/min	0-3.5m/min	0-3.9m/min
Power Supply	AC110、220V/50、60Hz			
Power Consumption	30 W	70 W	70 W	70 W
Net Weight	48.0kgs	158.0kgs	176.0kgs	215.0kgs
Dimension (L x W x H)	910×450×360mm	1610×680×445mm	1885x595x1180mm	2085x595x1180mm

LD-1600EMHTN

Cold Laminator

CE



LD-1600EMHTN

Specification:

Model:	LD-1200EMHTN	LD-1400EMHTN	LD-1600EMHTN
Max Laminating Width	1200mm	1400mm	1600mm
Operation Method	Electric		
Max Lifting Thickness of Roller	25mm	25mm	25mm
Pressure Adjustment Method	Combined		
Temperature Adjustment Rang	Room temperature-60 °C		
Speed	0.1-2m/min	0-3.5m/min	0-3.9m/min
Power Supply	AC110、220V/50、60Hz		
Power Consumption	1000W	2000W	2500W
Net Weight	170.0kgs	192.0kgs	217.0kgs
Dimension (L x W x H)	1680×680×445mm	1885x595x1180mm	2085x595x1180mm

